




- * Armatürde ışık kısmı tamamen alüminyumdan üretilmiş tir ve temperli camlıdır.
- * Armatürde kullanılan reflektör, yüksek yansıtma özelliğine sahip petek şekilli, kaliteli alüminyumdan üretilmiştir.
- * Sigorta ve Ba lantı Terminali alt gövde borusunun içine monte edilmiştir.
- * Terminal Kapa ı Sıfır kesitli ve su geçirmez contalıdır.
- * Elektro Galvanizli Çelikten üretilen Zemin Montaj Elemanı, Flan ılı ve 3 Blondan oluşmaktadır.
- * Kullanılan tüm vidalar paslanmaz çeliklidir.
- * Dış etkenlere karşı dayanıklı Antibulle katkılı, Elektrostatik Polyester Toz Boyalıdır.
- * isteğe bağlı tüm RAL renkler kullanılabilir.

- * The Luminary Part of the fitting is completely manufactured from Aluminium with the tempered glass.
- * The Honeycomb shaped reflector which is used in the fitting has a high level reflection characteristics, manufactured by quality aluminium.
- * The connection terminal and Fuse Box are mounted into the lower side of the body pole.
- * Terminal cover has zero section with the water resist gasket.
- * Ground Mounting Element is made of Galvanized Steel with three anchor bolts and flange.
- * All screws are made of stainless steel.
- * The Paint is Electrostatic Polyester with The Antibulle alloyed resistant to all external factors.
- * All RAL Colours can be applied upon request.



HIT 150W

4600mm

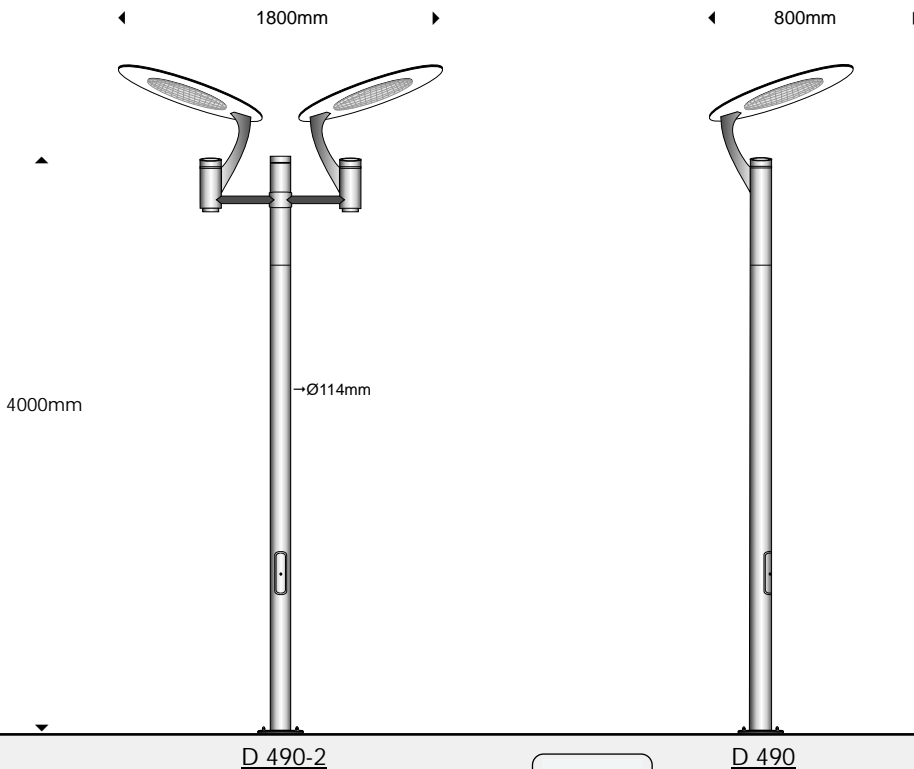

D 490-2

D 490

Class 1
Korunma sınıfı :IP.65. ⚠



ISO 9001:2000

